

HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS

Model : **V 100 LS 5 PULSE**

Manufacturer :



PERFORMANCE

5 stainless steel heated levels including 4 presentation shelves.
Led lighting on the entire showcase.
Double recovery technology and air circulation all around the hot packaged products.
The display is kept at legal temperature by a hot air curtain on the front and each shelf is ventilated and regulated.
Regulation by thermostat from 68°F to 194°F (display on customer side) and regulatory temperature maintenance of 145°F guaranteed at the heart of the products.

ERGONOMIC

Tempered glass retainer on each shelf
4 casters including 2 with brakes.

A BEAUTIFUL DESIGN

Right and left side windows for panoramic mirror effect

OPTIONS

20° Inclined stainless steel shelf



SAFETY

Tempered glass protection.



POWER SUPPLY

Standard: 220V Triphase
20 Amps
8360 Watts

HEATED SELF-SERVICE DISPLAY


SPECIFICATIONS

Model : **V 100 LS 5 PULSE**


Manufacturer :



SIDE VIEW

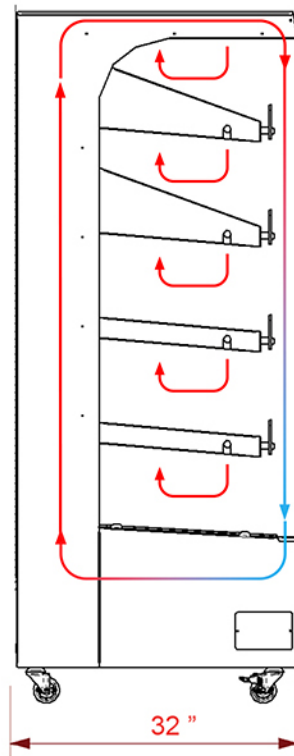

FRONT VIEW

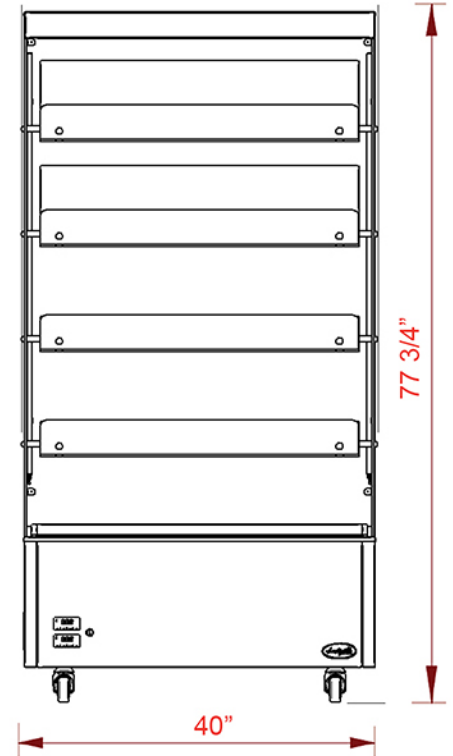

References	Width	Depth	Height	Voltage	Plug	Power
	40"	32"	77 3/4"	220 V Triphase	20 A	8.36 Kw